HIGH VOLTAGE DC ADAPTERS



- High Voltage DC Adapter
- Input voltage from 200VDC and up to 2000VDC

RHxS

- Output voltage up to 100VDC
- Epoxy filled for electrical insulation


Specifications

Input Voltage:	From 0-200VDC up to 0-2000VDC
Output Voltage:	0-100VDC
Temperature range:	-10 to +54°C
Dimensions:	55 x 110 x 75mm
Weight:	0,4kg


Models

Туре	Input VDC	Output VDC
RH200S	0-200VDC	0-100VDC
RH400S	0-400VDC	0-100VDC
RH800S	0-800VDC	0-100VDC
RH1000S	0-1000VDC	0-100VDC
RH1200S	0-1200VDC	0-100VDC
RH1600S	0-1600VDC	0-100VDC
RH2000S	0-2000VDC	0-100VDC

Dimension



75mm

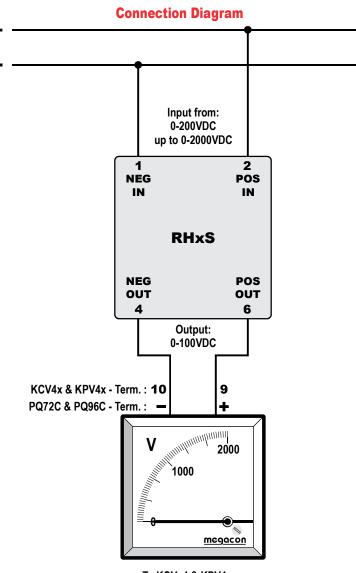

To KCVx4 & KPV4x or PQ72C & PQ96C series Scale: Up to 2000VDC

Norway Denmark United Kingdom



www.megacon.com

ELECTRONIC CONTROL AND INSTRUMENTATION

REF: Datasheet.RHxS - REV: 1.00/02.2022 © All rights reserved to Megacon legacon reserves the right to make any changes to the information at any time

CE